

FC2-MG-T50-2

2.4mm Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC-50GHz
VSWR:	1.3
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC min.
Impedance:	50Ω

Mechanical


RF Connector:	2.4mm Male
Mating Cable:	FT50, FA300
Outer Conductor:	303F stainless steel

How To Order

FC2-MG-T50-2

Customization is available upon request.

Outline Drawings

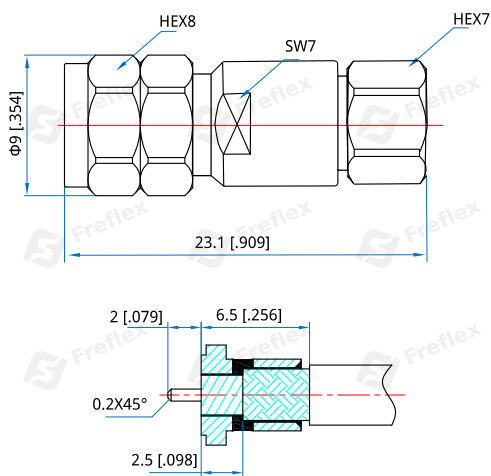

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]