

FC2-MG-T50P-4

2.4mm Male

Features:

* Low VSWR

Applications:

* Wireless
* Radar
* Instruments
* Electronics

Electrical

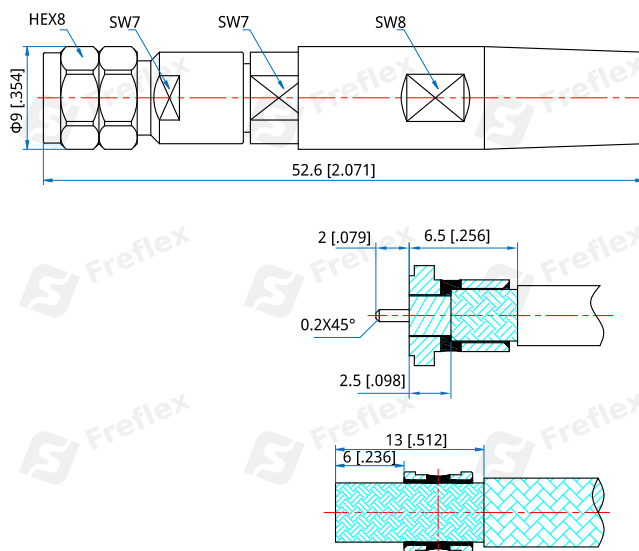
Frequency:	DC-50GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC min.
Impedance:	50Ω

Mechanical

RF Connector:	2.4mm Male
Mating Cable:	FT50P
Outer Conductor:	303F stainless steel

How To Order
FC2-MG-T50P-4

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]