

# FC3-MG-Z600-1

## 3.5mm Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC ~ 26.5GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω

### Mechanical


RF Connector:	3.5mm male
Mating Cable:	FZ600
Body:	Passivated stainless steel
Dielectric:	PTFE/PEI
Inner Conductor:	Gold plated brass/Gold plated beryllium copper

### How To Order

**FC3-MG-Z600-1**

Customization is available upon request.

### Outline Drawings

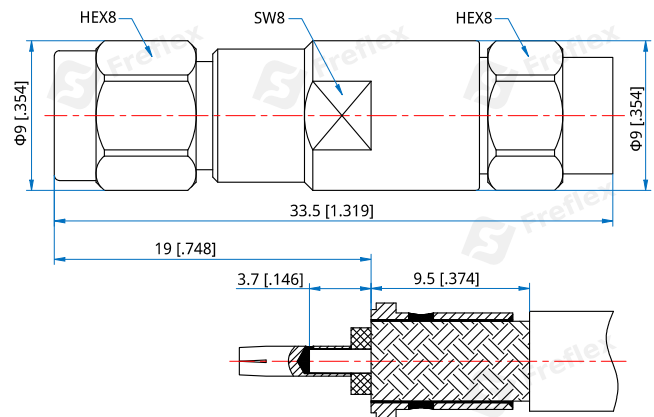

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]