

FC4-MCB-R1000-1

4.3-10 Male, Crimp

Features:

* Low VSWR

Applications:

* Wireless
* Radar
* Instruments
* Electronics

Electrical

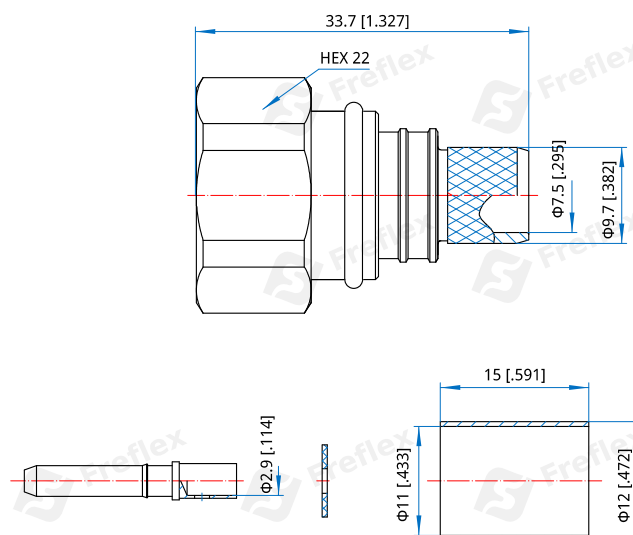
Frequency:	DC~6GHz
Insertion Loss:	0.3dB max.
VSWR:	1.3 max.
Voltage Withstand:	1500Vrms
Impedance of Dielectric:	5000M Ω min.
Impedance:	50 Ω

Mechanical

RF Connector:	4.3-10 Male
Operation Life:	500 Cycles min.
Mating Cable:	FR1000, LMR400
Outer Conductor:	SuCo Plated Brass
Insulator:	Teflon
Contact Pin:	Silver Plated Brass

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings


Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order
FC4-MCB-R1000-1

Customization is available upon request.