

FCA-FHB-047-1

SSMA Female, Bulk Head

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics


Electrical

Frequency:	DC~26.5GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC

Mechanical

RF Connector:	SSMA female
Mating Cable:	FD047
Outer Conductor:	Gold plated brass

Outline Drawings

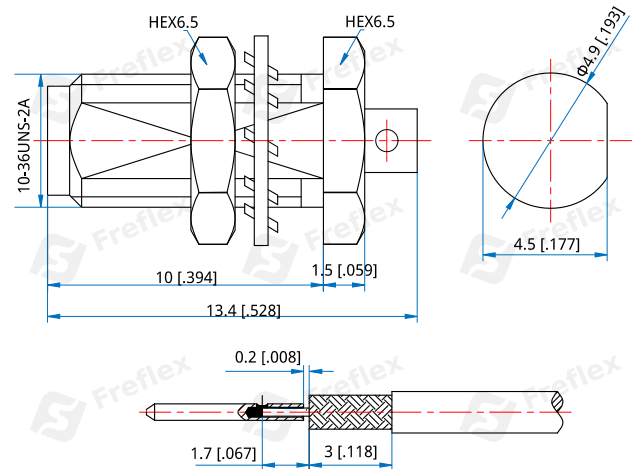

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FCA-FHB-047-1

Customization is available upon request.