

## FCA-FL2B-047-1

### SSMA Female, 2-Hole Flange Mount

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

|                          |             |
|--------------------------|-------------|
| Frequency:               | DC~26.5GHz  |
| VSWR:                    | 1.35 max.   |
| Impedance of Dielectric: | 5000MΩ min. |
| Voltage Withstand:       | 500V DC min |
| Impedance::              | 50Ω         |

#### Mechanical


|                  |                            |
|------------------|----------------------------|
| RF Connector:    | SSMA Female                |
| Mating Cable:    | FA150, FH160, FD047, FE047 |
| Outer Conductor: | Beryllium copper           |

#### How To Order

**FCA-FL2B-047-1**

Customization is available upon request.

#### Outline Drawings

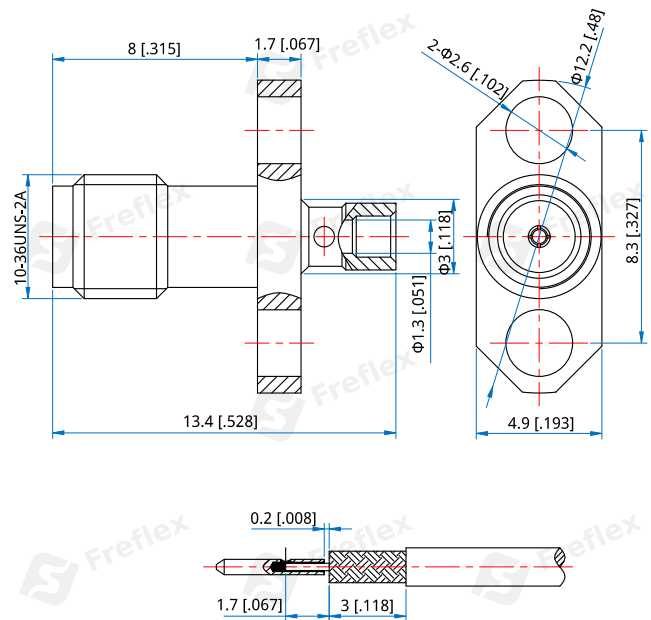

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]