

FCB-MG-A360-1

BNC Male

Features:

- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Instruments
- * Electronics

Electrical

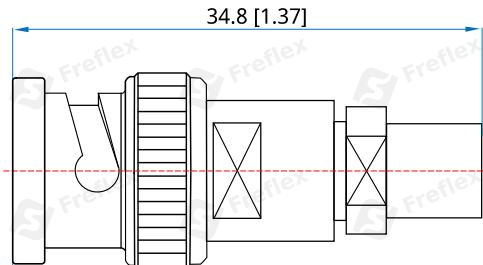
Frequency:	DC~4GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω

Mechanical

RF Connector:	BNC male
Mating Cable:	QA360
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

Environmental

Temperature: -55~+165°C

Outline Drawings

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCB-MG-A360-1

Customization is available upon request.