

FCB-MG-A500-1

BNC Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC-6GHz
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	1000V DC min
Impedance:	50 Ω

Mechanical


RF Connector:	BNC male
Mating Cable:	FA500
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

How To Order

FCB-MG-A500-1

Customization is available upon request.

Outline Drawings

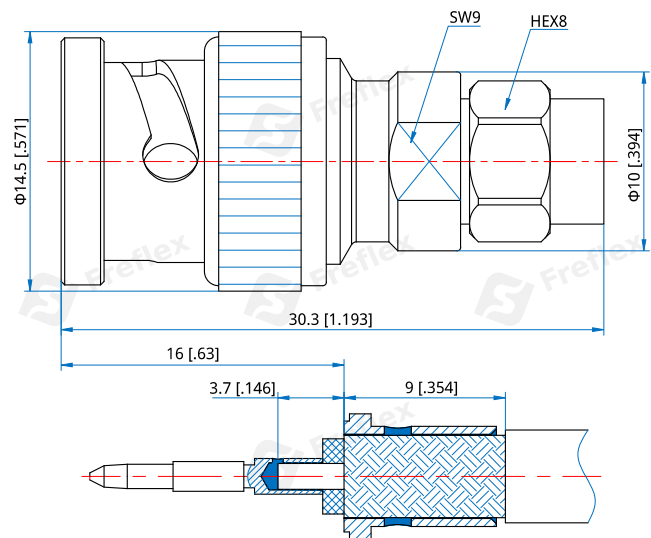

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]