

## FCE-MB-B1200-1

### SC Male

**Features:**

\* Low VSWR

**Applications:**

- \* Wireless
- \* Radar
- \* Instruments
- \* Electronics

**Electrical**

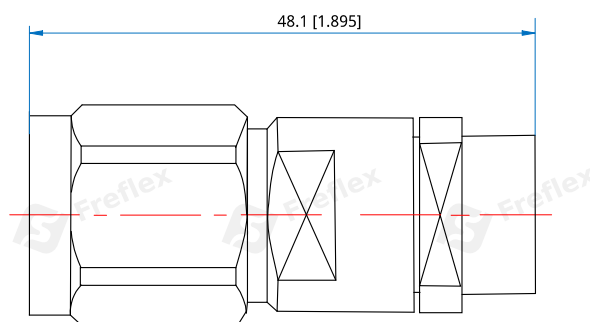
Frequency:	DC~11GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	2000V DC
Impedance:	50Ω

**Mechanical**

RF Connector:	SC Male
Mating Cable:	FB1200
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE
Inner Conductor:	Gold Plated Brass

**Environmental**

Temperature:	-55~+125°C
--------------	------------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**
**FCE-MB-B1200-1**

Customization is available upon request.