

FCF-MCB75-R1000-1

F Male, Crimp, 75 Ω

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics


Electrical

Frequency:	DC~2GHz
Dielectric Withstanding Voltage:	750V rms min.
Center Contact Resistance:	6M Ω max.
Outer Contact Resistance:	1M Ω max.
Insulation Resistance:	1000M Ω min.
Impedance:	75 Ω

Mechanical

RF Connector:	F male
Operation Life:	500 Cycles
Mating Cable:	FR1000, LMR400
Outer Conductor:	Nickel Plated Brass
Insulator:	Teflon
Contact Pin:	Gold Plated Brass

Outline Drawings

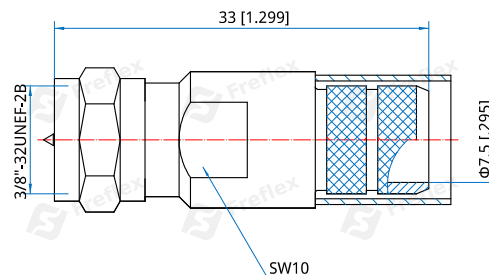

Unit: mm [in]
Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

FCF-MCB75-R1000-1

Customization is available upon request.