

FCG-FB-086-1

SSMP Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency:	DC-40GHz
VSWR:	1.4 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC min
Impedance:	50Ω

Mechanical


RF Connector:	SSMP Female
Mating Cable:	FH280, FD086, FE086, RG316, RG316D
Outer Conductor:	Beryllium copper

How To Order

FCG-FB-086-1

Customization is available upon request.

Outline Drawings

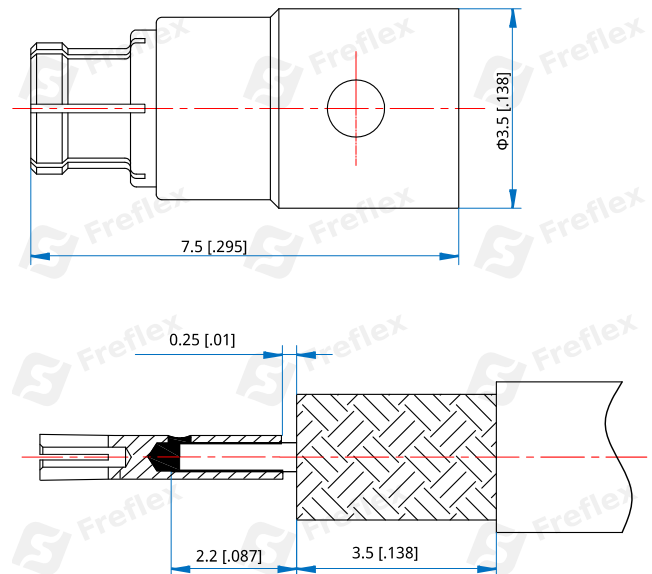

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]