


FCG-FRB-086-2

SSMP Female Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency:	DC-50GHz
VSWR:	1.5 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC min
Impedance:	50Ω

Mechanical



RF Connector:	SSMP Female Right Angle
Mating Cable:	FH280, FD086, FE086, RG316, RG316D
Outer Conductor:	Beryllium copper

How To Order

FCG-FRB-086-2

Customization is available upon request.

Outline Drawings

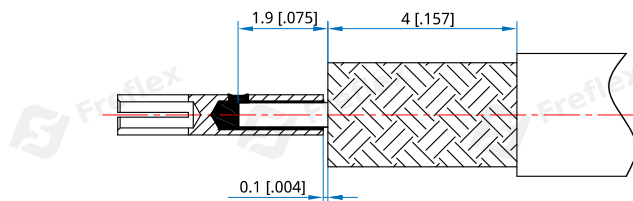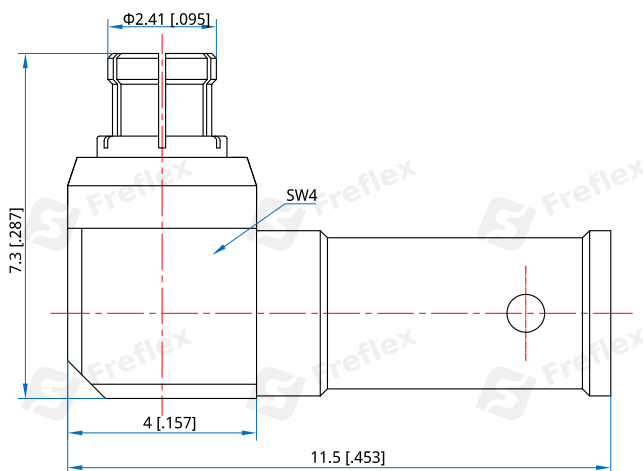

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]