

FCG-MB-086-1

SSMP Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~40GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500Vrms min.
Impedance:	50Ω

Mechanical



RF Connector:	SSMP Male
Mating Cable:	FH280, FE086, FD086, RG316
Outer Conductor:	Ternary alloy plated brass

How To Order

FCG-MB-086-1

Customization is available upon request.

Outline Drawings

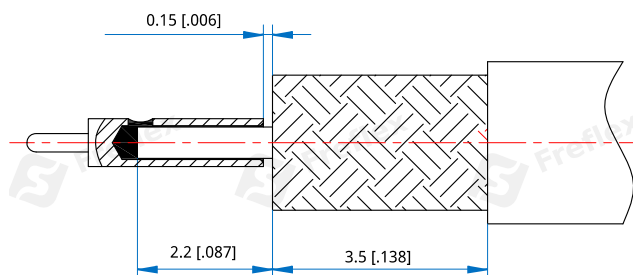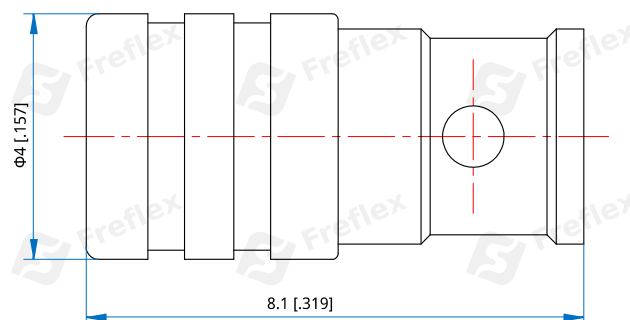

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]