

FCG-MRB-047-1

SSMP Male Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC min
Impedance:	50Ω

Mechanical


RF Connector:	SSMP Male Right Angle
Mating Cable:	FA150、FH160、FD047、FE047
Outer Conductor:	Beryllium copper

How To Order

FCG-MRB-047-1

Customization is available upon request.

Outline Drawings

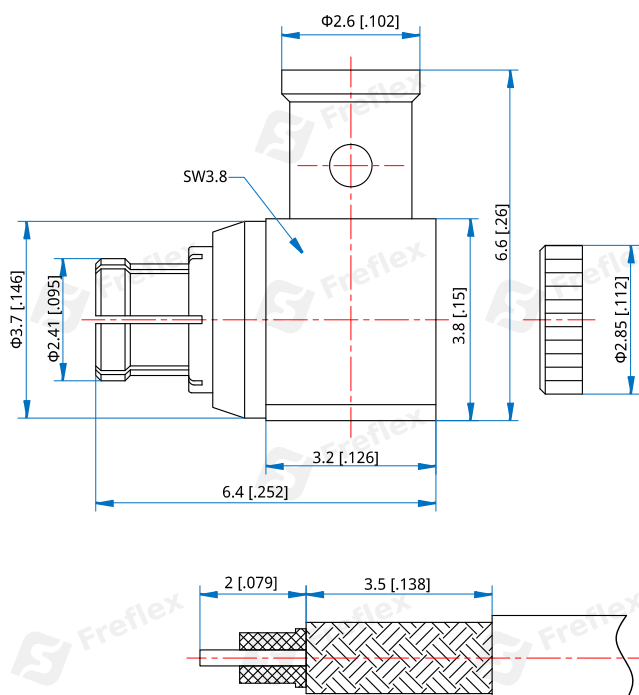

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]