

# FCK-FHG-A360-1

# 2.92mm Female Bulk Head

Features: Applications: \* Low VSWR \* Wireless

\* Radar

\* Instruments

\* Electronics

### **Electrical**

Impedance of Dielectric:  $5000M\Omega$  min. Voltage Withstand: 1000Vrms min.

 $\begin{tabular}{ll} VSWR: & 1.25 max. \\ Impedance: & 50 \Omega \end{tabular}$ 

### Mechanical

RF Connector: 2.92mm Female Bulk Head

Mating Cable: FA360


Outer Conductor: Passivated stainless steel

### **How To Order**

## FCK-FHG-A360-1

Customization is available upon request.

## **Outline Drawings**

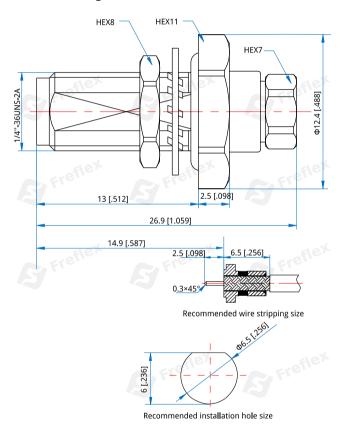

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1