

FCK-FL2G-A220-1

2.92mm Female, 2-Hole Flange Mount

Features:

* Low VSWR

Applications:

* Wireless

* Radar

* Instruments

* Electronics

Electrical

Frequency: DC~40GHz

VSWR: 1.25 max.

Impedance: 50Ω

Mechanical

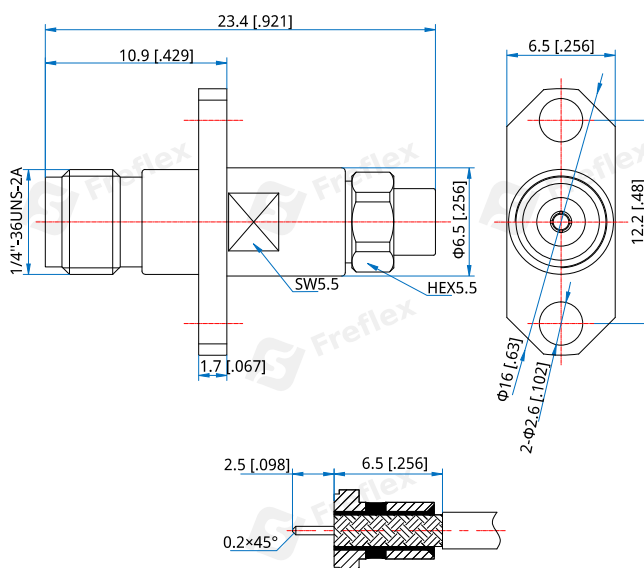
RF Connector: 2.92mm Female

Mating Cable: FH280, FD086, FE086, RG316, RG316D

Outer Conductor: 303F stainless steel

How To Order
FCK-FL2G-A220-1

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]