

FCK-FL2G-A360-1

2.92mm Female, 2-Hole Flange Mount

Features: Applications: * Low VSWR * Wireless

* Radar * Instruments

* Electronics

Electrical

Frequency: DC~40GHz VSWR: 1.3 max. Impedance: 50Ω

Mechanical

RF Connector: 2.92mm Female

Mating Cable: FA360


Outer Conductor: Passivated stainless steel
Inner Conductor: Gold plated beryllium copper

How To Order

FCK-FL2G-A360-1

Customization is available upon request.

Outline Drawings

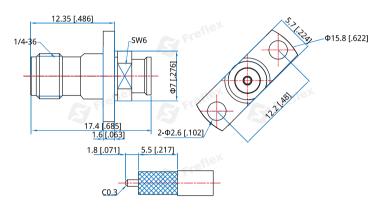

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1