

## FCK-FL4G-A360-1

# 2.92mm Female, 4-Hole Flange Mount

Features: Applications: \* Low VSWR \* Wireless

\* Radar

\* Instruments

\* Electronics

#### **Electrical**

Frequency: DC~40GHz VSWR: 1.3 max. Impedance:  $50\Omega$ 

#### Mechanical

RF Connector: 2.92mm Female

Mating Cable: FA360


Outer Conductor: Passivated stainless steel
Inner Conductor: Gold plated beryllium copper

#### **How To Order**

### FCK-FL4G-A360-1

Customization is available upon request.

## **Outline Drawings**

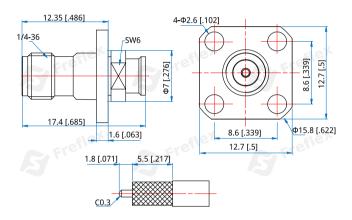

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1