

FCK-MG-034-1

2.92mm Male

Features:

- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Instruments
- * Electronics

Electrical

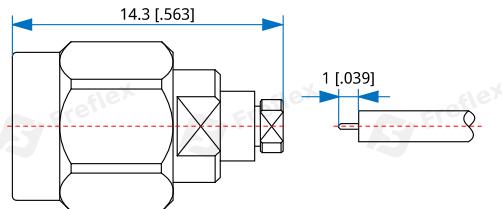
Frequency:	DC~40GHz
VSWR:	1.25 max.
Impedance of Dielectric:	1000MΩ min.
Voltage Withstand:	300V
Impedance:	50Ω

Mechanical

RF Connector:	2.92mm Male
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper
Mating Cable:	FD034, FE034

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order**FCK-MG-034-1**

Customization is available upon request.