

FCK-MG-A400-1

2.92mm Male

Features:

* Low VSWR

Applications:

* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC ~ 40GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω

Mechanical


RF Connector:	2.92mm Male
Mating Cable:	FA400
Body:	303F stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium

How To Order

FCK-MG-A400-1

Customization is available upon request.

Outline Drawings

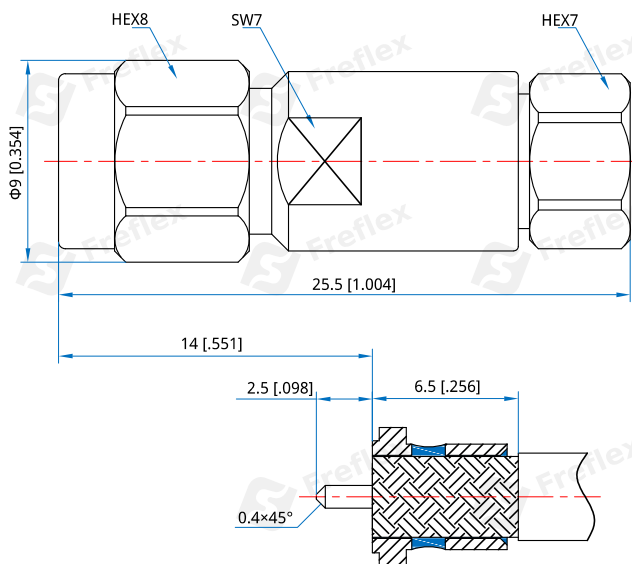

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]