

# **FCK-MG-A500-1** 2.92mm Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

## Electrical

Frequency: DC~26.5GHz  
VSWR: 1.3 max.  
Impedance: 50Ω

## Mechanical



RF Connector: 2.92mm male  
Mating Cable: FA480, FA500, FG500  
Outer Conductor: Passivated stainless steel  
Inner Conductor: Gold plated beryllium copper

## How To Order

**FCK-MG-A500-1**

Customization is available upon request.

## Outline Drawings

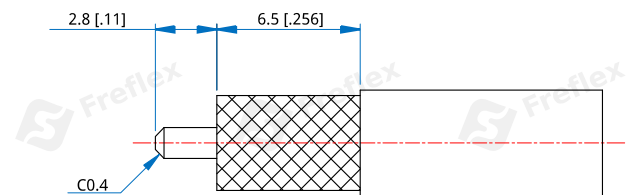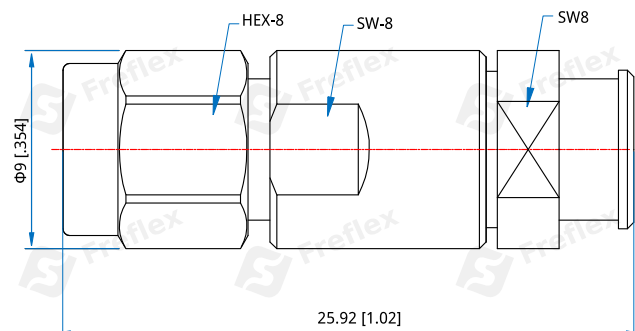

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]