

FCK-MRG-T50P-1

2.92mm Male Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC-40GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	750V DC min
Impedance:	50Ω

Mechanical


RF Connector:	2.92mm Male Right Angle
Mating Cable:	FT50P
Outer Conductor:	303F stainless steel

How To Order

FCK-MRG-T50P-1

Customization is available upon request.

Outline Drawings

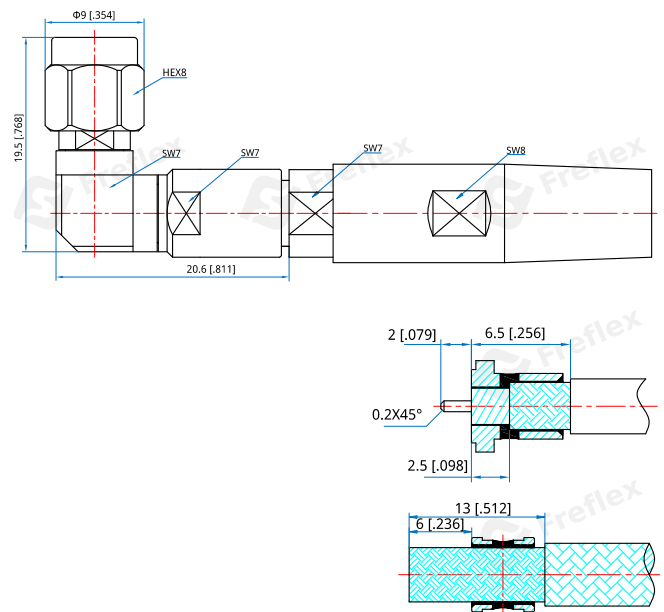

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]