

FCM-MB-086-1

MCX Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~6GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical


RF Connector: MCX Male
Mating Cable: FB1200
Outer Conductor: Brass/Gold plated beryllium copper
Dielectric: PTFE
Innerr Conductor: Gold plated brass

How To Order

FCM-MB-086-1

Customization is available upon request.

Outline Drawings

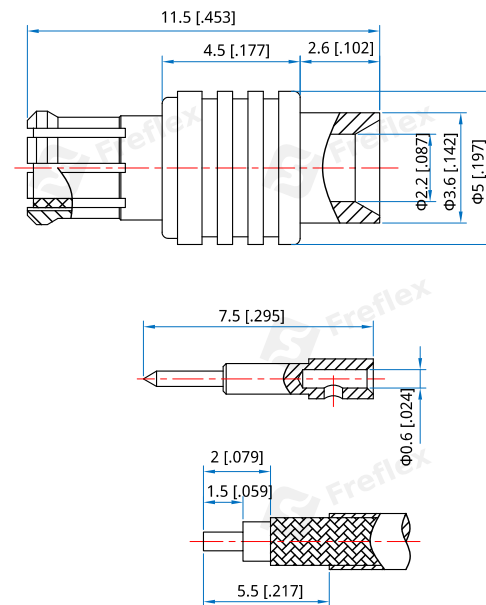

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]