

## FCN-FG-A800-1

### N Female

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

Frequency: DC ~ 18GHz  
VSWR: 1.4 max.  
Impedance: 50Ω

#### Mechanical


RF Connector: N Female  
Mating Cable: FA800  
Inner Conductor: Gold plated beryllium copper  
Outer Conductor: Passivated stainless steel

#### How To Order

**FCN-FG-A800-1**

Customization is available upon request.

#### Outline Drawings

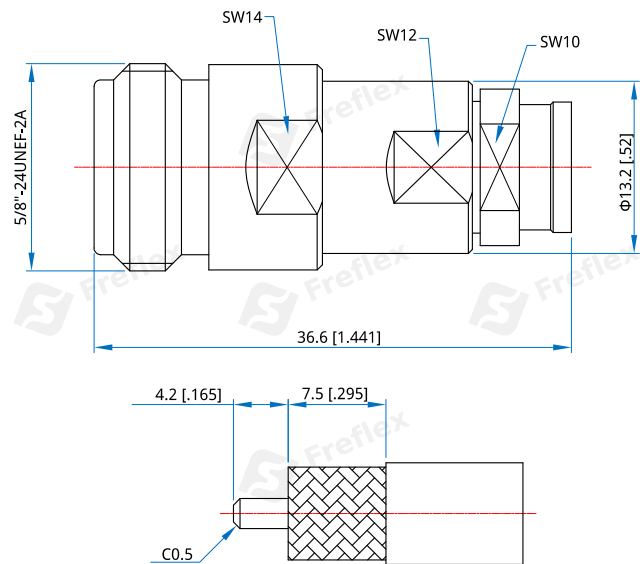

Unit: mm [in]  
Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]