

FCN-FG-B1200-1

N Female

Features:

* Low VSWR

Applications:

- * Wireless
- * Radar
- * Instruments
- * Electronics

Electrical

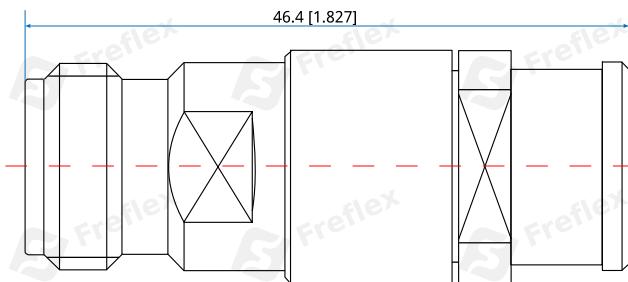
Frequency:	DC~10GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	2500V
Impedance:	50Ω

Mechanical

RF Connector:	N Female
Mating Cable:	FB1200
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated stainless steel
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

Environmental

Temperature: -55~+165°C

Outline Drawings

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order**FCN-FG-B1200-1**

Customization is available upon request.