

FCN-FHB-086-1

N Female, Bulk Head

Features:

* Low VSWR

Applications:

* Wireless

* Radar

* Instruments

* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V
Impedance:	50Ω

Mechanical

RF Connector:	N female bulk head
Mating Cable:	FH280, FE086, FD086, RG316
Mating Life Cycle:	500 cycles
Outer Conductor:	Ternary alloy plated brass
Inner Conductor:	Gold plated beryllium copper
Dielectric:	PTFE

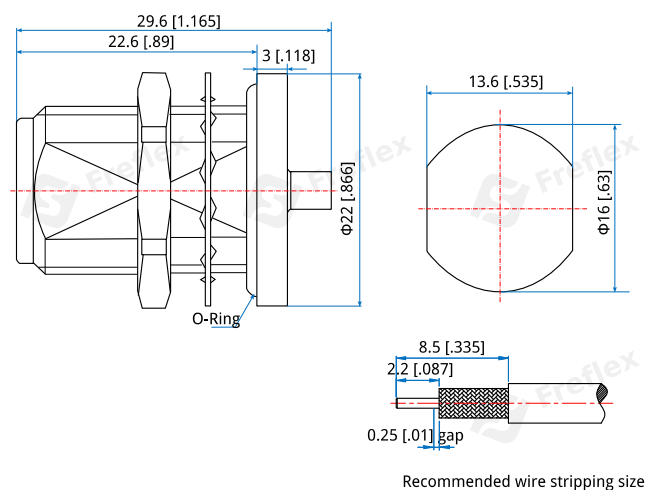
Environmental

Temperature:	-55~+165°C
--------------	------------

How To Order

FCN-FHB-086-1

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]