

FCN-FHB-141-2

N Female, Bulk Head

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.35 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V
Impedance:	50Ω


Mechanical

RF Connector:	N female bulk head
Mating Cable:	FH400, FK141, FF141, FE141
Durability:	500 cycles
Outer Conductor:	Ternary alloy plated brass
Inner Conductor:	Gold plated beryllium copper
Dielectric:	PTFE

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

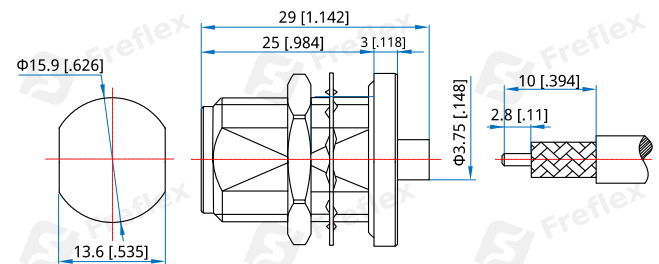

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FCN-FHB-141-2

Customization is available upon request.