

FCN-FHCB-RG316D-1

N Female, Bulk head, Crimp

Features: * Low VSWR Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~6GHz

VSWR: 1.15 max. @DC~3GHz

Impedance: 50Ω

Mechanical

RF Connector: N Female Mating Cable: RG316D

Material: Nickel plated brass

Dielectric: PTFE

Inner Conductor: Gold plated phosphor copper


or gold plated brass

How To Order

FCN-FHCB-RG316D-1

Customization is available upon request.

Outline Drawings

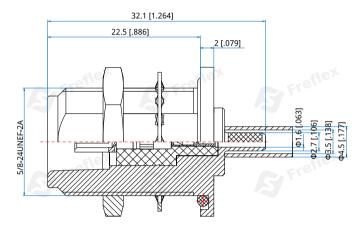

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1