

FCN-FL4B-086-2

N Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.15 max.@6GHz
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC max.
Impedance:	50Ω


Mechanical

RF Connector:	N Female
Mating Cable:	FH280, FE086, FD086, RG316
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE, N/A
Inner Conductor:	Sliver plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

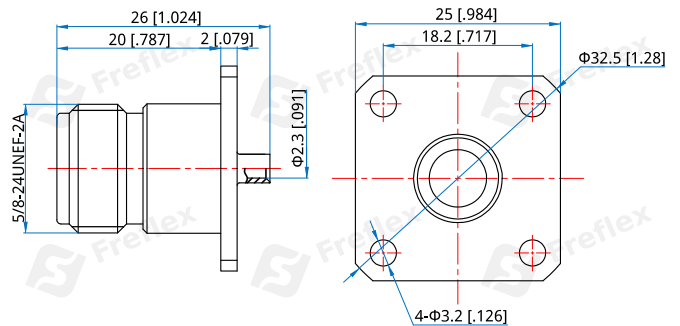

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCN-FL4B-086-2

Customization is available upon request.