

FCN-FL4ZB-R600-1

N Connector, DC~6GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.13 max. @3GHz
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V max.
Impedance of Contact (Center):	1mΩ max.
Impedance of Contact (Outer):	0.25mΩ max.
Impedance:	50Ω


Mechanical

RF Connector:	N Female
Mating Cable:	QR600
Mating Life Cycle:	500 cycles min.
Outer Conductor:	Nickel plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

Environmental

Temperature:	-45~+125°C
--------------	------------

Outline Drawings

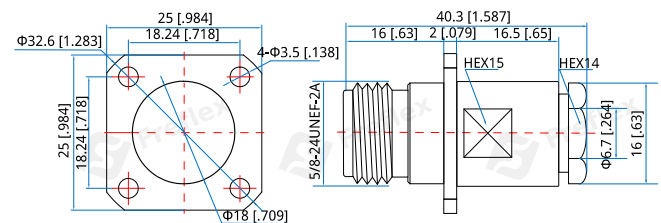

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCN-FL4ZB-R600-1

Customization is available upon request.