

FCN-MG-A360-1

N Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω

Mechanical


RF Connector:	N Male
Mating Cable:	FA360
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

How To Order

FCN-MG-A830-1

Customization is available upon request.


Outline Drawings

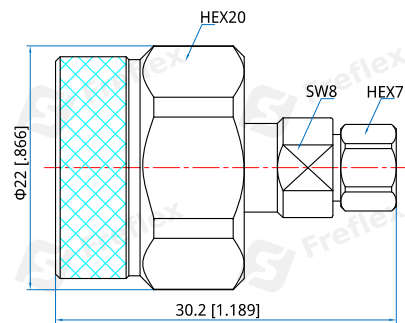

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Stripping Reference



Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]