

FCN-MG-G360-1

N Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min
Impedance:	50Ω

Mechanical



RF Connector:	N Male
Mating Cable:	FG360
Outer Conductor:	Passivated stainless steel
Dielectric:	PTFE
Innerr Conductor:	Gold plated beryllium copper

How To Order

FCN-MG-G360-1

Customization is available upon request.

Outline Drawings

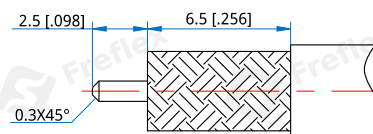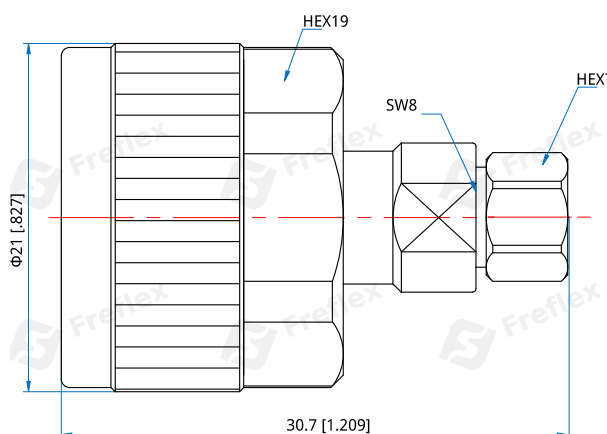

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]