

FCN-MRB-086-2

N Male Right Angle

Features: * Low VSWR

Applications: * Wireless

* Radar * Instruments

* Electronics

Electrical

Frequency: DC~6GHz

Mechanical

RF Connector: N male right angle Mating Cable: FH280, FE086, FD086, RG316

Outer Conductor: Ternary alloy plated brass


Silver plated brass Inner Conductor: Nickel plated brass Jacket:

How To Order

FCN-MRB-086-2

Customization is available upon request.

Outline Drawings

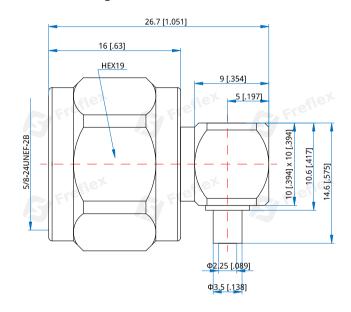

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Rev 1.1 Freflex Inc. sales@freflex.com www.freflex.com