

FCP-FRL2B-047-1

SMP Female Right Angle, 2-Hole Flange Mount

Features:

* Low VSWR

Applications:

- * Wireless
- * Radar
- * Instruments
- * Electronics

Electrical

Frequency:	DC~40GHz
VSWR:	1.5 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V
Impedance:	50Ω

Mechanical

RF Connector:	SMP Female Right Angle
Mating Cable:	FA150, FH160, 047
Mating Life Cycle:	100 cycles
Outer Conductor:	Gold plated beryllium copper, Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental


Temperature: -55~+125°C

How To Order

FCP-FRL2B-047-1

Customization is available upon request.

Outline Drawings

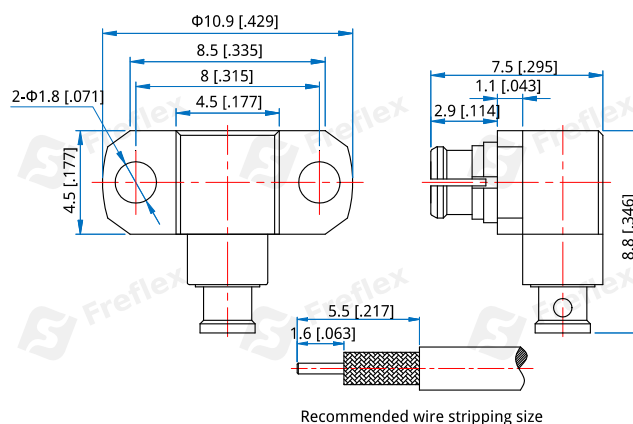

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]