

## FCP-MRB-086-1

### SMP Male Right Angle

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

Frequency: DC~6GHz  
VSWR: 1.2 max.  
Impedance: 50Ω

#### Mechanical

RF Connector: SMP male right angle  
Mating Cable: FH280, FD086, FE086, RG316, RG316D  
Outer Conductor: Gold plated brass  
Dielectric: PTFE  
Inner Conductor: Gold plated brass

#### Environmental


Temperature: -55~+125°C

#### How To Order

**FCP-MRB-086-1**

Customization is available upon request.

#### Outline Drawings

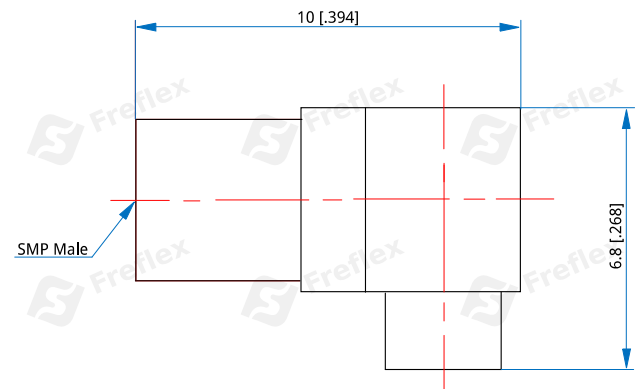

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]