

FCPL-ML2B-086-2

SMP Male, 2-Hole Flange Mount

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~40GHz
VSWR:	1.5 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V
Impedance:	50Ω


Mechanical

RF Connector:	SMP male
Mating Life Cycle:	250 cycles min.
Detent Mode:	Limited detent
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper
Mating Cable:	FH280, FE086, FD086, RG316

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings

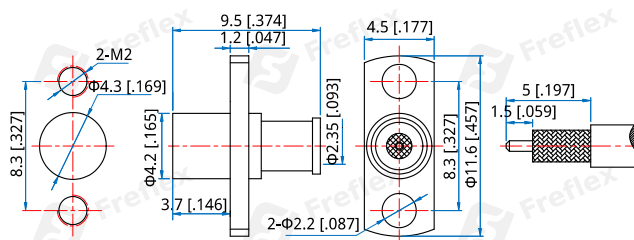

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCPL-ML2B-086-2

Customization is available upon request.