

FCS-FB-086-2

SMA Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency: DC~26.5GHz
VSWR: 1.25 max.

Mechanical

RF Connector: SMA Female
Mating Cable: FH280, FE086, FD086, RG316
Outer Conductor: Gold plated brass
Dielectric: PTFE
Inner Conductor: Gold plated Beryllium copper

Environmental


Temperature: -55~+165°C

How To Order

FCS-FB-086-2

Customization is available upon request.

Outline Drawings

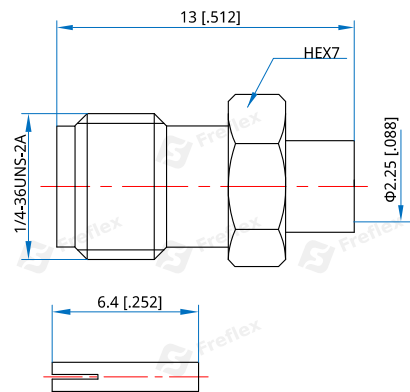

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]