

FCS-FG-A830-1

SMA Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~18GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical


RF Connector: SMA Female
Mating Cable: FA830
Outer Conductor: Stainless steel 303 passivation
Inner Conductor: Gold plated beryllium copper

How To Order

FCS-FG-A830-1

Customization is available upon request.

Outline Drawings

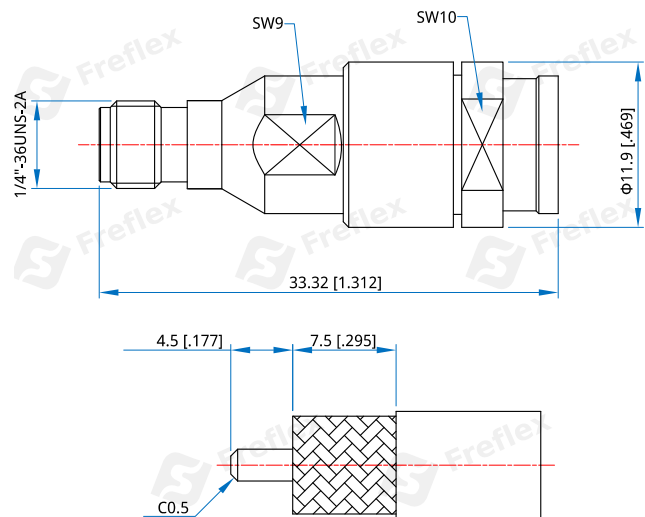

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]