

FCS-FHB-034-1

SMA Female Bulk Head

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V rms
Impedance:	50Ω

Mechanical


RF Connector:	SMA female bulk head
Outer Conductor:	Nickel plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper
Mating Cable:	FD034, FE034

How To Order

FCS-FHB-034-1

Customization is available upon request.

Outline Drawings

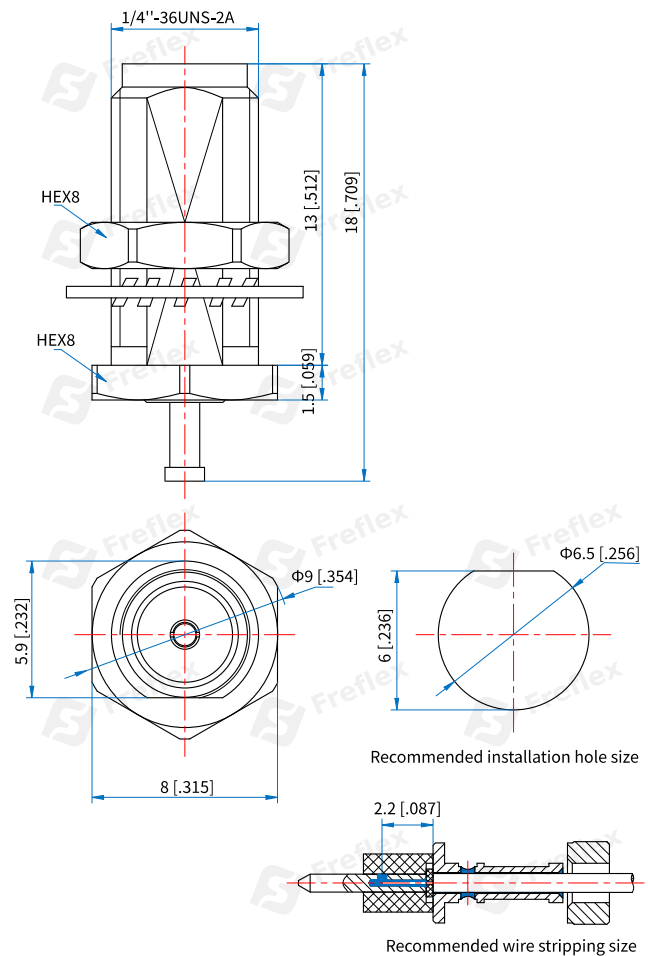

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]