

FCS-FHG-047-1

SMA Female Bulk Head

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.35 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500Vrms min

Mechanical


RF Connector:	SMA female bulk head
Mating Cable:	FA150, FH160, 047
Outer Conductor:	Passivated stainless steel
Inter Conductor:	Gold plated beryllium copper, Gold plated brass
Dielectric:	PTFE

How To Order

FCS-FHG-047-1

Customization is available upon request.

Outline Drawings

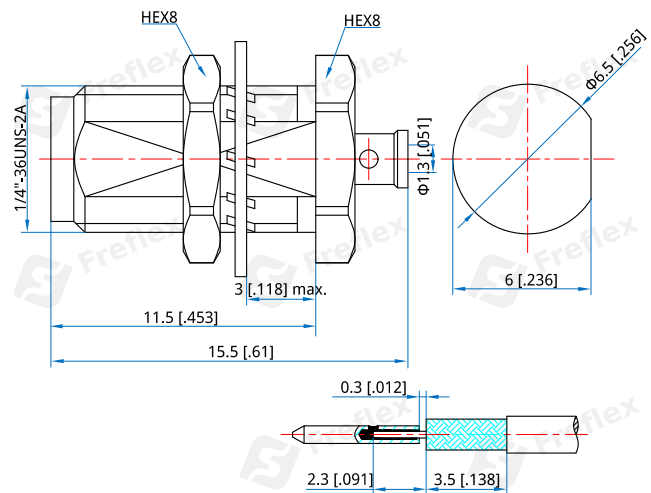

Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]