

FCS-FL2B-141-1 SMA Female, 2-Hole Flange Mount

Features: * Low VSWR

- Applications: * Wireless
- * Radar

* Instruments * Electronics

Electrical

Frequency: DC~18GHz VSWR: 1.25 max. Impedance: 50Ω

Mechanical


RF Connector: Mating Cable: Outer Conductor: SMA Female FH400, FD141, FE141 Brass

How To Order

FCS-FL2B-141-1

Customization is available upon request.

Outline Drawings

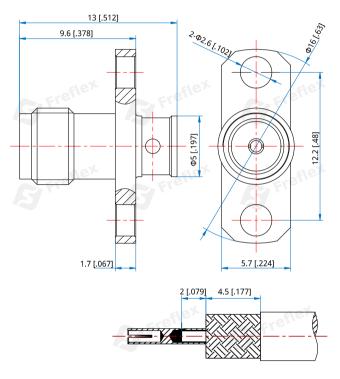

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]