

FCS-FL4G-A360-1

SMA Female, 4-Hole Flange Mount

Features: * Low VSWR Applications:
* Wireless
* Radar

* Instruments

* Electronics

Electrical

Frequency: DC~18GHz VSWR: 1.3 max. Impedance: 50Ω

Mechanical

RF Connector: SMA Female Mating Cable: FA360


Outer Conductor: Passivated stainless steel

How To Order

FCS-FL4G-A360-1

Customization is available upon request.

Outline Drawings

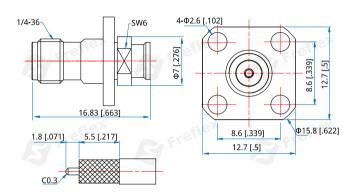

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1