

FCS-MCB-R1500-1

SMA Male, Crimp

Features:

* Low VSWR

Applications:

* Wireless
* Radar
* Instruments
* Electronics

Electrical

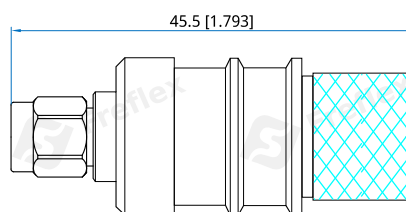
Frequency:	DC~6GHz
VSWR:	1.3 max.
Voltage Withstand:	1000V DC
Impedance of Dielectric:	5000MΩ min.
Impedance:	50Ω

Mechanical

RF Connector:	SMA male
Mating Cable:	FR1500
Mating Life Cycle:	500 cycles
Outer Conductor:	Ternary alloy plated brass
Inner Conductor:	Gold plated brass
Dielectric:	PTFE

Environmental

Operating Temperature:	-55~+165°C
------------------------	------------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order
FCS-MCB-R1500-1

Customization is available upon request.