

FCS-MCB-RG316D-1

SMA Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics


Electrical

Frequency:	DC ~ 6GHz
VSWR:	1.25 max.
Impedance of Dielectric:	1000MΩ min.
Voltage Withstand:	1000V
Impedance:	50Ω

Mechanical

RF Connector:	SMA Male
Mating Cable:	RG316D
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass

Outline Drawings

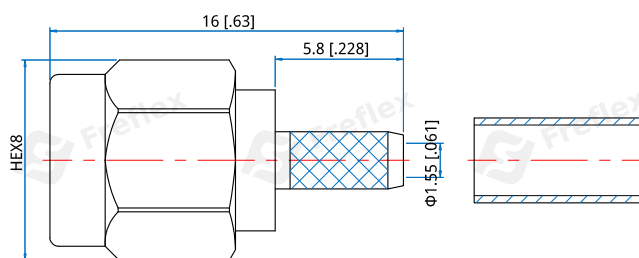

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FCS-MCB-RG316D-1

Customization is available upon request.