

FCS-MG-047-3

SMA Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~26.5GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical


RF Connector: SMA male
Mating Cable: QA150, QH160, QD047, QE047
Connection sleeve: Stainless steel
Outer Conductor: Gold plated brass
Inner Conductor: Gold plated brass

How To Order

FCS-MG-047-3

Customization is available upon request.

Outline Drawings

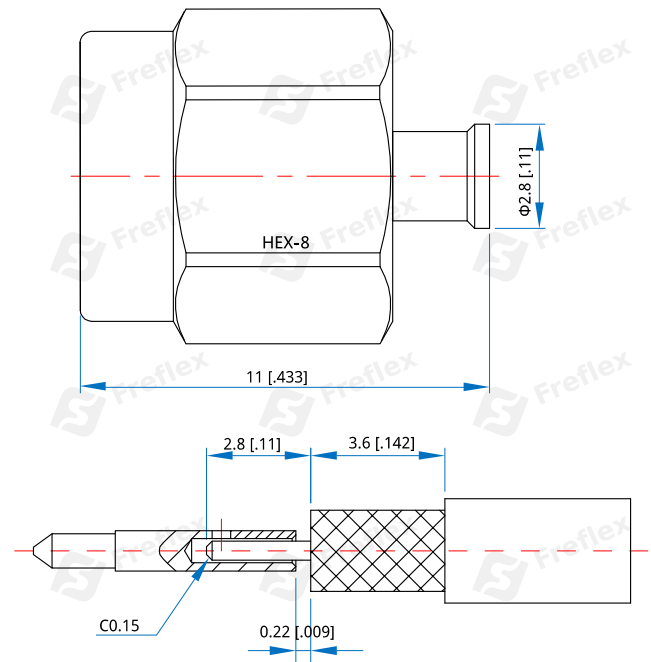

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]