

FCS-MG-141-3

SMA Male

Features:

- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Instruments
- * Electronics


Electrical

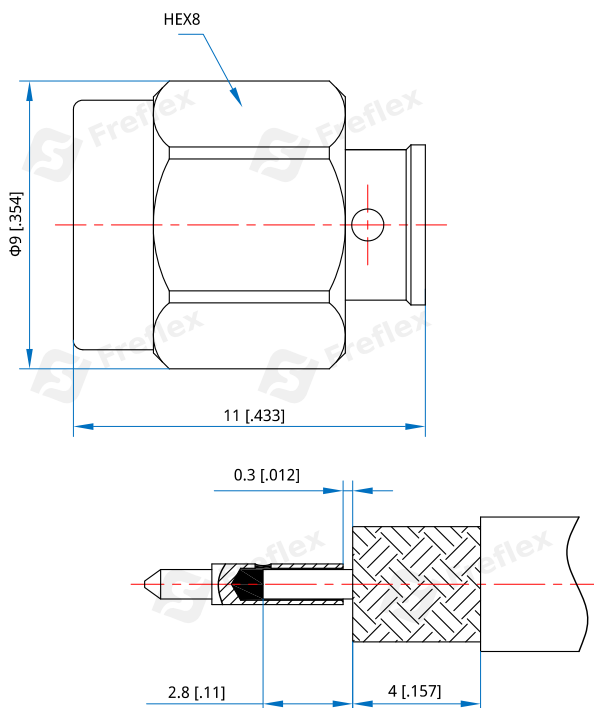
Frequency:	DC~26.5GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω

Mechanical

RF Connector:	SMA Male
Mating Cable:	FH400, FD141, FE141
Outer Conductor:	Stainless steel

How To Order
FCS-MG-141-3

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]