

FCS-MG-A400-2

SMA Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~26.5GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical


RF Connector: SMA male right angle
Mating Cable: FA400
Outer Conductor: Passivated stainless steel
Inner Conductor: Gold plated brass

How To Order

FCS-MG-A400-2

Customization is available upon request.

Outline Drawings

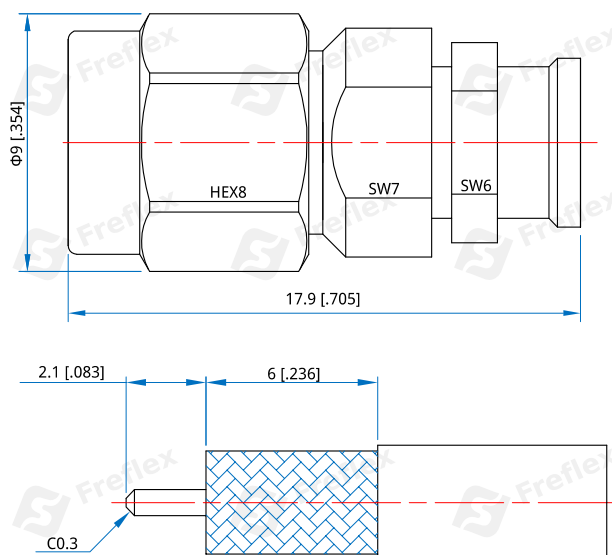

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]