

## FCS-MG-A800-2

### SMA Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



#### Electrical

Frequency: DC~18GHz  
VSWR: 1.25 max.  
Impedance: 50Ω

#### Mechanical



RF Connector: SMA Male  
Mating Cable: FA800  
Outer Conductor: Passivated Stainless Steel

#### How To Order

**FCS-MG-A800-2**

Customization is available upon request.

#### Outline Drawings

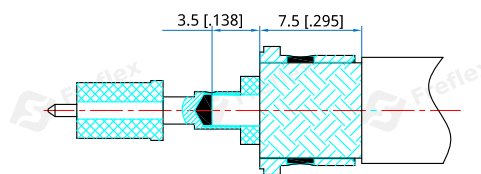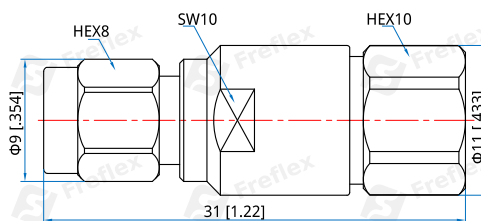

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]