

FCS-MG-G360-1

SMA Male

Features: * Low VSWR Applications: * Wireless

* Radar

* Instruments

* Electronics

Electrical

Frequency: DC~26.5GHz VSWR: 1.25 max.

Impedance: 50Ω

Mechanical

RF Connector: SMA Male Mating Cable: FG360


Outer Conductor: Passivated stainless steel
Inner Conductor: Gold plated brass

How To Order

FCS-MG-G360-1

Customization is available upon request.

Outline Drawings

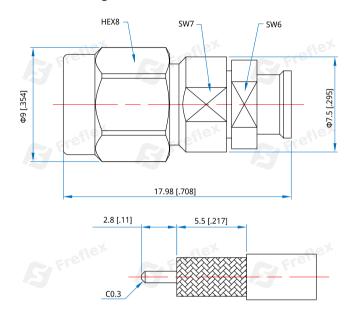

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1