

# FCS-MG-T50-1

## SMA Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency: DC~26.5GHz  
VSWR: 1.3 max.

### Mechanical


RF Connector: SMA male  
Mating Cable: FT50  
Outer Conductor: Passivated stainless steel  
Inner Conductor: Gold plated brass

### How To Order

**FCS-MG-T50-1**

Customization is available upon request.

### Outline Drawings

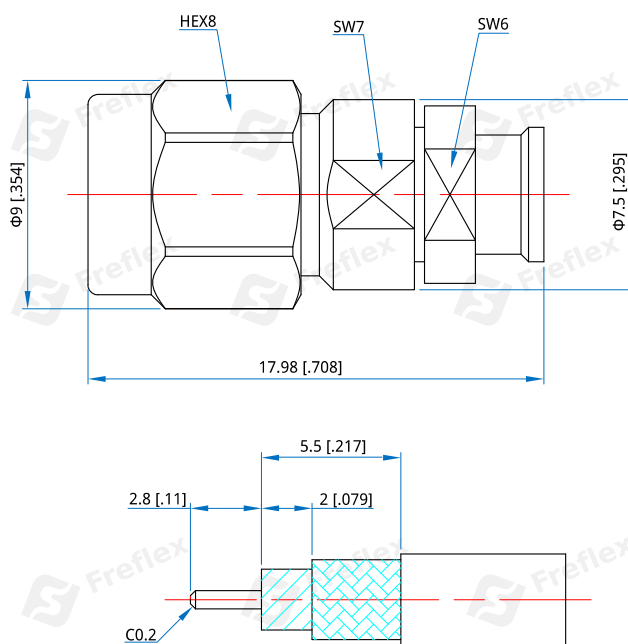

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]